




UTR SERIES

The UTR Series is applied when both a compact rectangular configuration and maximum heat transfer surface/performance is critical. The variety of model sizes allow the UTR to be located within the gen-set housing to meet critical space limitations. Flexible exhaust gas connection locations and sizes also allow the UTR to adapt easily to an OEM packager's design needs. The capability of removing the core assembly without disturbing the exhaust gas connections, makes cleaning and inspecting the finned tubing fast and efficient. This is especially important when operating with fuel oil types which can foul the heating surface and require a periodic maintenance schedule.

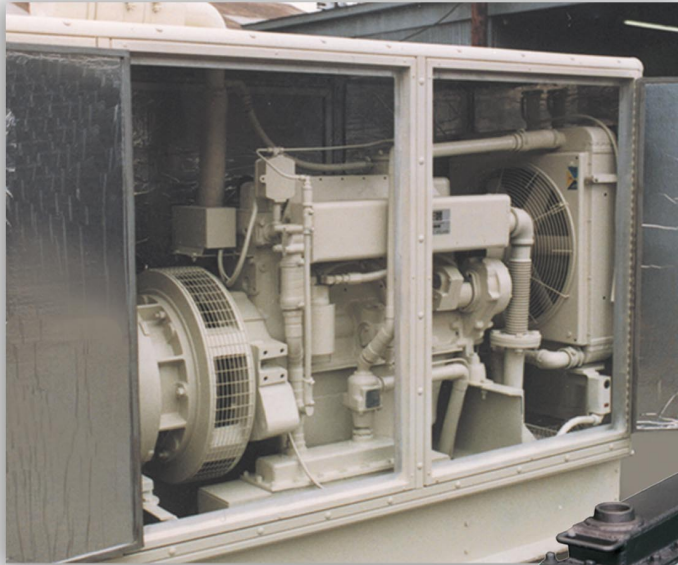

Totally Enclosed Stainless Steel Interior

Factory Insulation (2 - 8")


Seam-Welded .25" thks. Hard Shell Case

Excellent Sound Attenuation

Header Manifold for High Liquid Flow and Low Static Head

Liquid Inlet/Outlet Connection

Flexible exhaust gas connection locations and sizes allows the UTR to adapt easily to an OEM packager's design needs

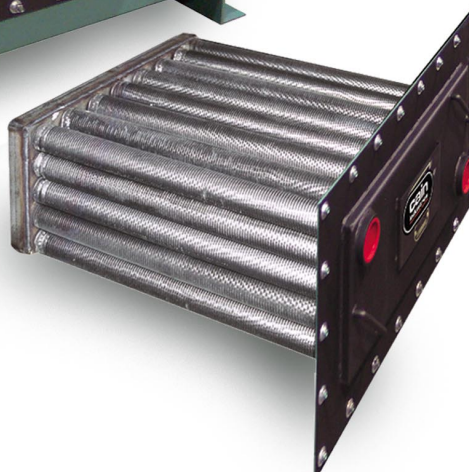

Removable Core Assembly, Showing Finned Tubing And Manifold Configuration, Provides Complete Access To The Heating Surface For Cleaning And Maintenance